



# PUNTE FISSE per RETTIFICA

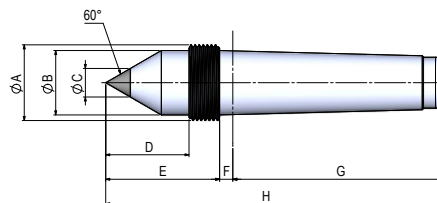

## SERIE FG-W / Series FG-W

Punta fissa per rettifica in metallo duro / Hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)								CHIAVE DI ESTRAZIONE / Removal Key (mm)	GHIERA / Ring Nut (KM)	SERIE / Series	CODICE / Code	€
	$\varnothing A$	$\varnothing B$	C	D	E	F	G	H					
C.M.3	M30x1,5	24	11	35	50	5	81	136	21	6	FG3/W11	RFS003.000.19	380,00
	M30x1,5	24	24	35	50	5	81	136	21	6	FG3/W24	RFS003.000.01	420,00
C.M.4	M35x1,5	31,5	14	41	56	6,5	102,5	165	28	7	FG4/W14	RFS004.000.19	430,00
	M35x1,5	31,5	31,5	41	56	6,5	102,5	165	28	7	FG4/W31	RFS004.000.01	600,00
C.M.5	M50x1,5	44	25	65	80	6,5	129,5	216	40	10	FG5/W25	RFS005.000.19	530,00
	M50x1,5	44	44	65	80	6,5	129,5	216	40	10	FG5/W44	RFS005.000.01	700,00
C.M.6	M70x2	64	40	80,5	95,5	8	182	285,5	60	14	FG6/W40	RFS006.000.19	830,00

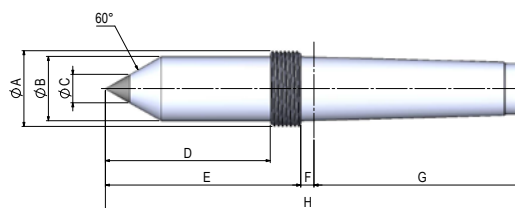


## SERIE FGL-W / Series FGL-W

Punta fissa **lunga** per rettifica in metallo duro / **Extended** hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)								CHIAVE DI ESTRAZIONE / Removal Key (mm)	GHIERA / Ring Nut (KM)	SERIE / Series	CODICE / Code	€
	$\varnothing A$	$\varnothing B$	C	D	E	F	G	H					
C.M.3	M30x1,5	24	11	70	85	5	81	171	21	6	FGL3/W11	RFS003.000.27	410,00
	M30x1,5	24	24	70	85	5	81	171	21	6	FGL3/W24	RFS003.000.28	440,00
C.M.4	M35x1,5	31,5	14	81	96	6,5	102,5	205	28	7	FGL4/W14	RFS004.000.07	450,00
	M35x1,5	31,5	31,5	81	96	6,5	102,5	205	28	7	FGL4/W31	RFS004.000.08	620,00
C.M.5	M50x1,5	44	25	105	120	6,5	129,5	256	40	10	FGL5/W25	RFS005.000.28	680,00
	M50x1,5	44	44	105	120	6,5	129,5	256	40	10	FGL5/W44	RFS005.000.29	720,00
C.M.6	M70x2	64	40	110,5	125,5	8	182	315,5	60	14	FGL6/W40	RFS006.000.03	850,00


# PUNTE FISSE per RETTIFICA

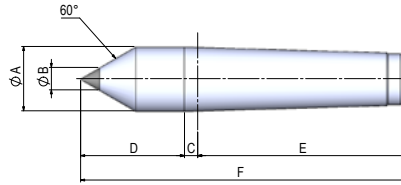

## SERIE FT-W / Series FT-W

Punta fissa per rettifica in metallo duro / Hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)						SERIE / Series	CODICE / Code	€
	ØA	ØB	C	D	E	F			
C.M.3	24,1	11	5	39	81	125	FT3/W11	RFS003.000.14	370,00
	24,1	24,1	5	39	81	125	FT3/W24	RFS003.000.12	410,00
C.M.4	31,6	14	6,5	51	102,5	160	FT4/W14	RFS004.000.14	420,00
	31,6	31,6	6,5	51	102,5	160	FT4/W31	RFS004.000.32	590,00
C.M.5	44,7	25	6,5	64	129,5	200	FT5/W25	RFS005.000.14	520,00
	44,7	44,7	6,5	64	129,5	200	FT5/W44	RFS005.000.05	680,00
C.M.6	63,8	40	8	80	182	270	FT6/W	RFS006.000.14	820,00

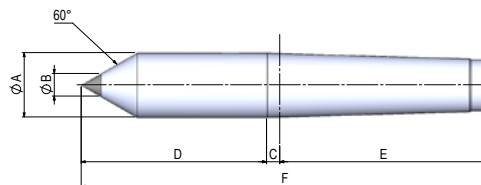


## SERIE FTL-W / Series FTL-W

Punta fissa **lunga** per rettifica in metallo duro / **Extended** hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)						SERIE / Series	CODICE / Code	€
	ØA	ØB	C	D	E	F			
C.M.3	24,1	11	5	74	81	160	FTL3/W11	RFS003.000.08	390,00
	24,1	24,1	5	74	81	160	FTL3/W24	RFS003.000.07	430,00
C.M.4	31,6	14	6,5	91	102,5	200	FTL4/W14	RFS004.000.26	450,00
	31,6	31,6	6,5	91	102,5	200	FTL4/W31	RFS004.000.25	610,00
C.M.5	44,7	25	6,5	104	129,5	240	FTL5/W25	RFS005.000.11	670,00
	44,7	44,7	6,5	104	129,5	240	FTL5/W44	RFS005.000.10	710,00
C.M.6	63,8	40	8	110	182	300	FTL6/W	RFS006.000.11	830,00

# PUNTE FISSE per RETTIFICA

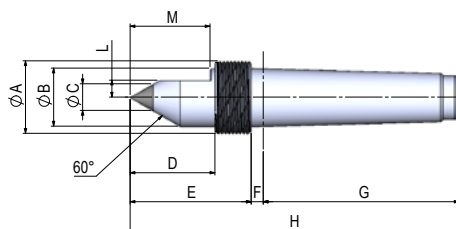


## SERIE FGR-W / Series FGR-W

Punta fissa per rettifica in metallo duro / Hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)										CHIAVE DI ESTRAZIONE / Removal Key (mm)	GHIERA / Ring Nut (KM)	SERIE / Series	CODICE / Code	€
	ØA	ØB	ØC	D	E	F	G	H	L	M					
C.M.3	M30x1,5	24	11	35	50	5	81	136	7	33	21	6	FGR3/W11	RFS003.000.02	450,00
	M30x1,5	24	18	35	50	5	81	136	10,5	33	21	6	FGR3/W18	RFS003.000.22	470,00
	M30x1,5	24	24	35	50	5	81	136	9	33	21	6	FGR3/W24	RFS003.000.25	590,00
C.M.4	M35x1,5	31,6	14	41	56	6,5	102,5	165	8,5	38	28	7	FGR4/W14	RFS004.000.03	500,00
	M35x1,5	31,6	20	41	56	6,5	102,5	165	11,5	38	28	7	FGR4/W20	RFS004.000.04	550,00
	M35x1,5	31,6	31,6	41	56	6,5	102,5	165	10,5	38	28	7	FGR4/W31	RFS004.000.05	670,00
C.M.5	M50x1,5	44,7	14	65	80	6,5	129,5	216	9	61	40	10	FGR5/W14	RFS005.000.02	585,00
	M50x1,5	44,7	30	65	80	6,5	129,5	216	17	61	40	10	FGR5/W30	RFS005.000.25	600,00
	M50x1,5	44,7	44,7	65	80	6,5	129,5	216	17	61	40	10	FGR5/W44	RFS005.000.26	770,00
C.M.6	M70x2	64	40	80,5	95,5	8	182	285,5	22	75	60	14	FGR6/W40	RFS006.000.01	910,00

Speciale a richiesta anche M80 e M100 su specifiche tecniche del cliente / M80 and M100 on client's request and technical data

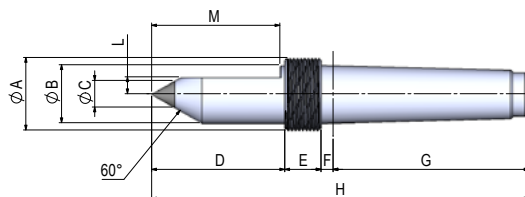


## SERIE FGRL-W / Series FGRL-W

Punta fissa lunga per rettifica con metallo duro / Extended hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)										CHIAVE DI ESTRAZIONE / Removal Key (mm)	GHIERA / Ring Nut (KM)	SERIE / Series	CODICE / Code	€
	ØA	ØB	ØC	D	E	F	G	H	L	M					
C.M.3	M30x1,5	24	11	70	85	5	81	171	7	68	21	6	FGRL3/W11	RFS003.000.29	465,00
	M30x1,5	24	18	70	85	5	81	171	10,5	68	21	6	FGRL3/W18	RFS003.000.30	485,00
	M30x1,5	24	24	70	85	5	81	171	9	68	21	6	FGRL3/W24	RFS003.000.31	605,00
C.M.4	M35x1,5	31,6	14	81	96	6,5	102,5	205	8,5	78	28	7	FGRL4/W14	RFS004.000.10	515,00
	M35x1,5	31,6	20	81	96	6,5	102,5	205	11,5	78	28	7	FGRL4/W20	RFS004.000.11	565,00
	M35x1,5	31,6	31,6	81	96	6,5	102,5	205	10,5	78	28	7	FGRL4/W31	RFS004.000.36	685,00
C.M.5	M50x1,5	44,7	14	105	120	6,5	129,5	256	9	101	40	10	FGRL5/W14	RFS005.000.30	600,00
	M50x1,5	44,7	30	105	120	6,5	129,5	256	17	101	40	10	FGRL5/W30	RFS005.000.31	615,00
	M50x1,5	44,7	44,7	105	120	6,5	129,5	256	17	101	40	10	FGRL5/W44	RFS005.000.32	785,00
C.M.6	M70x2	64	40	110,5	125,5	8	182	315,5	22	105	60	14	FGRL6/W40	RFS006.000.04	925,00


# PUNTE FISSE per RETTIFICA

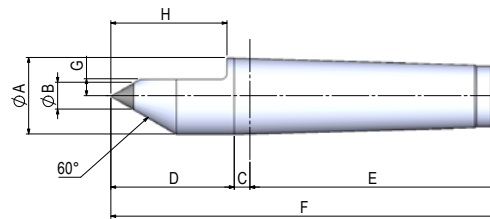

## SERIE FR-W / Series FR-W

Punta fissa per rettifica in metallo duro / Hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)								SERIE / Series	CODICE / Code	€
	ØA	ØB	C	D	E	F	G	H			
C.M.3	24,1	11	5	39	81	125	7	37	FR3/W11	RFS003.000.16	440,00
	24,1	18	5	39	81	125	10,5	37	FR3/W18	RFS003.000.11	460,00
	24,1	24,1	5	39	81	125	9	37	FR3/W24	RFS003.000.10	560,00
C.M.4	31,6	14	6,5	51	102,5	160	8,5	48	FR4/W14	RFS004.000.35	490,00
	31,6	20	6,5	51	102,5	160	11,5	48	FR4/W20	RFS004.000.34	540,00
	31,6	31,6	6,5	51	102,5	160	10,5	48	FR4/W31	RFS004.000.33	660,00
C.M.5	44,7	14	6,5	64	129,5	200	9	60	FR5/W14	RFS005.000.16	380,00
	44,7	30	6,5	64	129,5	200	17	60	FR5/W30	RFS005.000.04	590,00
	44,7	44,7	6,5	64	129,5	200	17	60	FR5/W44	RFS005.000.03	800,00
C.M.6	63,8	40	8	80	182	270	22	75	FR6/W40	RFS006.000.16	900,00

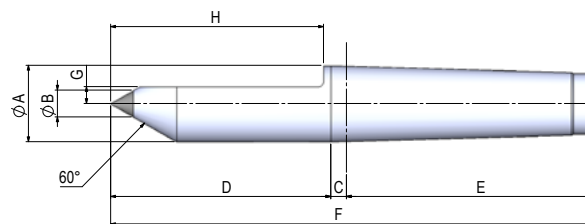

## SERIE FRL-W / Series FRL-W

Punta fissa **lunga** per rettifica in metallo duro / **Extended** hard metal dead center for grinding

CONO MORSE / Morse Taper	DIMENSIONI / Dimensions (mm)								SERIE / Series	CODICE / Code	€
	ØA	ØB	C	D	E	F	G	H			
C.M.3	24,1	11	5	74	81	160	7	72	FRL3/W11	RFS003.000.05	455,00
	24,1	18	5	74	81	160	10,5	72	FRL3/W18	RFS003.000.04	475,00
	24,1	24,1	5	74	81	160	9	72	FRL3/W24	RFS003.000.03	695,00
C.M.4	31,6	14	6,5	91	102,5	200	8,5	88	FRL4/W14	RFS004.000.30	500,00
	31,6	20	6,5	91	102,5	200	11,5	88	FRL4/W20	RFS004.000.29	555,00
	31,6	31,6	6,5	91	102,5	200	10,5	88	FRL4/W31	RFS004.000.28	575,00
C.M.5	44,7	14	6,5	104	129,5	240	9	100	FRL5/W14	RFS005.000.08	590,00
	44,7	30	6,5	104	129,5	240	17	100	FRL5/W30	RFS005.000.07	605,00
	44,7	44,7	6,5	104	129,5	240	17	100	FRL5/W44	RFS005.000.06	800,00
C.M.6	63,8	40	8	110	182	300	22	105	FRL6/W40	RFS006.000.06	915,00